

# 3 Inch Direct Thermal Label Printer

□Model: OCBP-013□

## Features:

CPCL and TSPL programming language;  
Support ESC/POS command for receipt printing;  
160mm/s high printing speed;  
Provide free label making software;  
Standard exterior paper holder;  
No paper warehouse design, no ribbon;  
External bracket paper holder, for printing two different types of labels;  
TPH special designed overcoat, endure large printing volume.

## Specification

General	
Model	OCBP-013
Color	White
Interface	USB(Standard),USB+LAN,USB+BT,USB+LAN(Optional)
Printer Head life	50Km
Power supply	Input□AC 100V-240V,50-60Hz,Output□DC 24V/2.5A
Inner code	Support 11 types font size
Auto paper cutter	No
Mechanical Noise	less than 60dB (A weighted RMS)
Compatible OS	Win9X/Win2000//Win2003/Win Vista/ Win 7/Window XP /win 8/win8.1/Win 10/IOS/Android
Safety standards	CE ,FCC,Rohs,CCC etc
Printing capability	
Printing method	Direct Thermal
Resoluiton	8 dots/mm(203 DPI)
print speed	200 mm /s
Print width	80mm Max
Print parameters	Support to download the Logo trademark
Printing command	CPCL/TSPL/ESC/POS
Barcode and character	
Barcode	1D barcode: UPC-A / UPC-E / JAN13 (EAN13) / JAN8 (EAN8) / CODE39 / ITF / CODABAR / CODE93 / CODE128 2D barcode:QR Code, PDF417
Media	
Media Sensor	Dual-media sensors: transmissive and reflective
Paper type	continuous paper, label paper, folded paper, tag paper
Paper width	83±0.5mm
Media thickness	0.06 ~ 0.3mm
Physical	

Dimension	160mm*110mm *93mm
Weight	Gross: 1.65kg
Environment	
Working temperature& humidity	0 to 45 degrees centigrade, 10%~80% No condensation
Storage temperature& humidity	-20 to 60 degrees centigrade , 10%~90% No condensation


















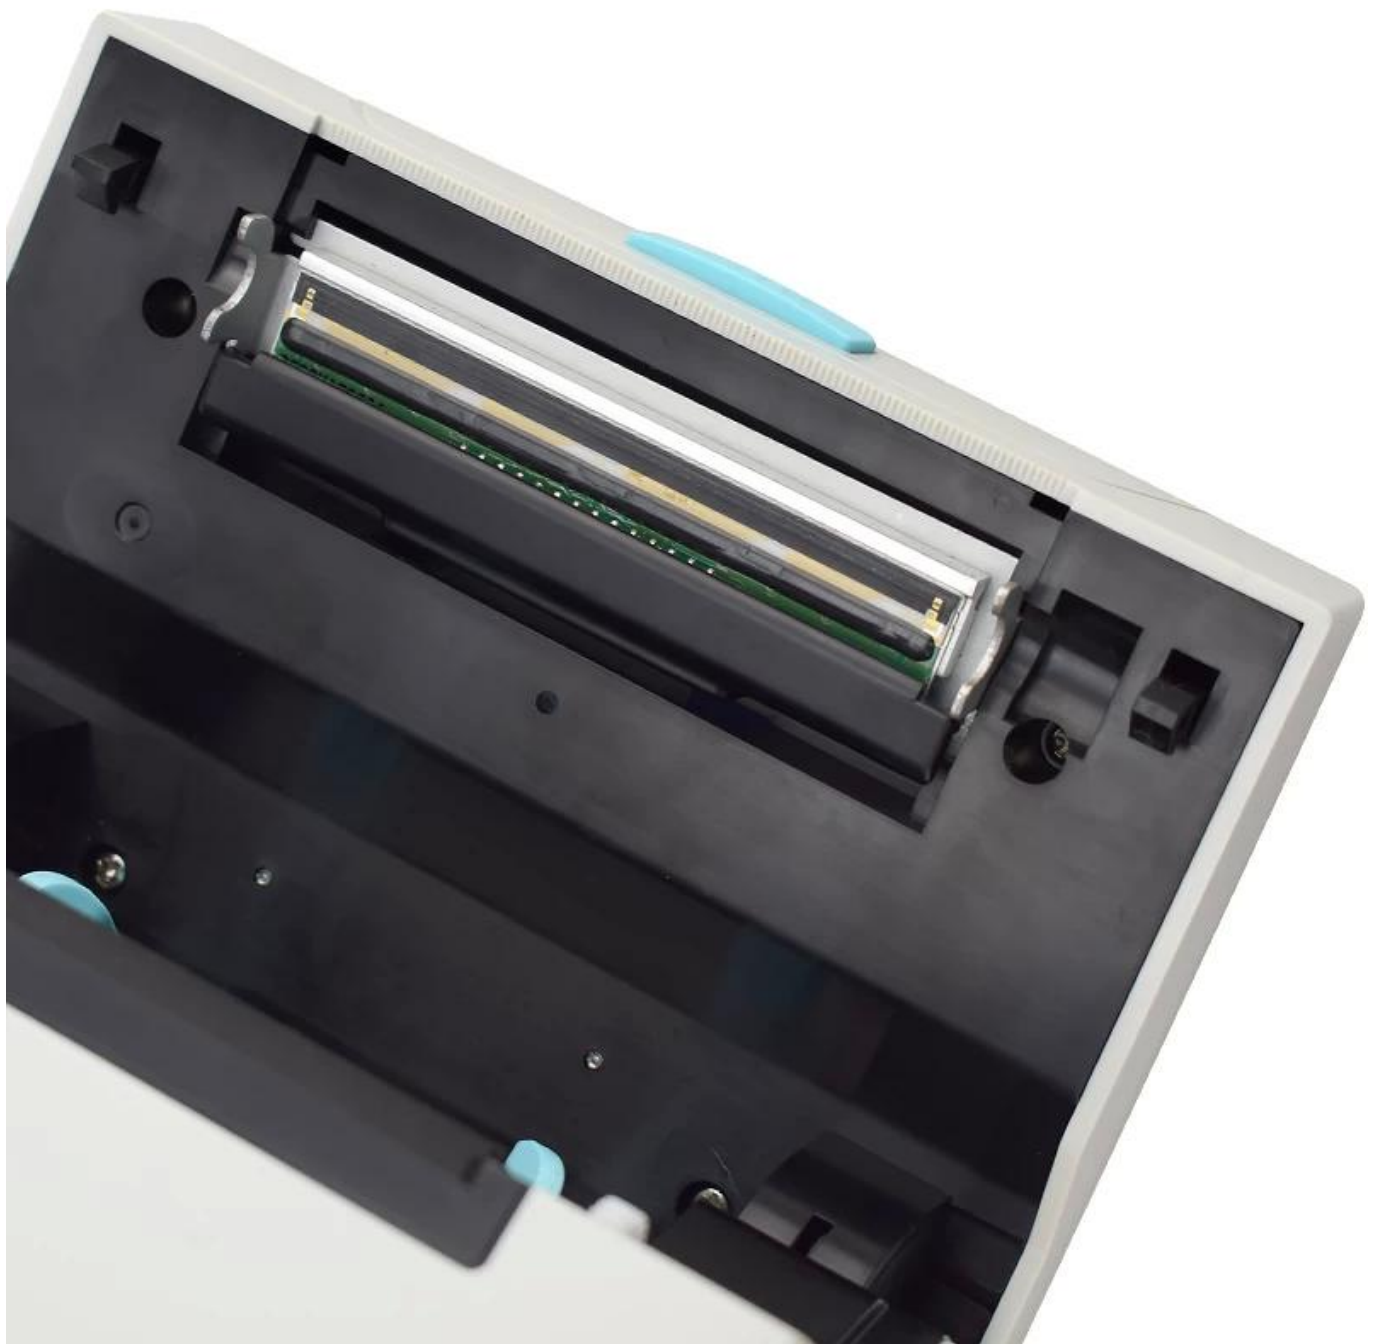



Relevant documents:

[Label Pritner CD](#)