

Hand held 2D Barcode Scanner

(M/N: OCBS-2012)

Feautre:

High performance imaging technology;

Omni-directional scanning, easy to scan;

High compatibility for all major 1D and 2D symbols;

Can read the barcode on the screen and color barcode;

5mil excellent scanning accuracy(Can be customized as required);

Multi special function setting supported;

Multi interfaces optional;


Specification:

Performance Characteristics		
Resolution	640 * 480, 256 gray levels	
Light Source	LED(617 nm \pm 10 nm)	
Illumination	0 ~ 100,000 LUX	
Scan angle	Roll 360°Pitch \pm 60°Skew \pm 65°	
Scanning Speed	300scan/s	
Symbology	2D	DataMatrix, Matrix 2 of 5, MaxiCode, MicroPDF417, MSI Code, PDF417, QR code, Standard 2 of 5, Telepen, TLC 39, etc.
	1D	Australian Post, Aztec, BPO, Canada Post, Codabar, Codablock, Code 11, Code 39, Code 93, Code 128/EAN128, Dutch Post, EAN.UCC Composite, Interleaved 2 of 5, Japan Post, Planet, Plessey Code, Postnet, RSS, UPC/EAN,etc.
Precision	\geq 5mil Can be customized as required	
Roll	360°	
Pitch	65°	
Skew	75°	
Physical Characteristics		
Interface	RS232 / USB/USB virtual COM	
Voltage	DC 5 V \pm 5%	
Current	190 mA (working)	
Cable	1.5m	
Weight	165g	
Dimensions	170 mm x 60 mm x95mm	
User Environment		
Operate Temperature	-5°C to 65°C	
Storage Temperature	-20°C to 70°C	
Humidity	5% - 95%(non-condensing)	
Shock	Drop from 150 cm to concrete floor	

Picture Show



OCBS-2012

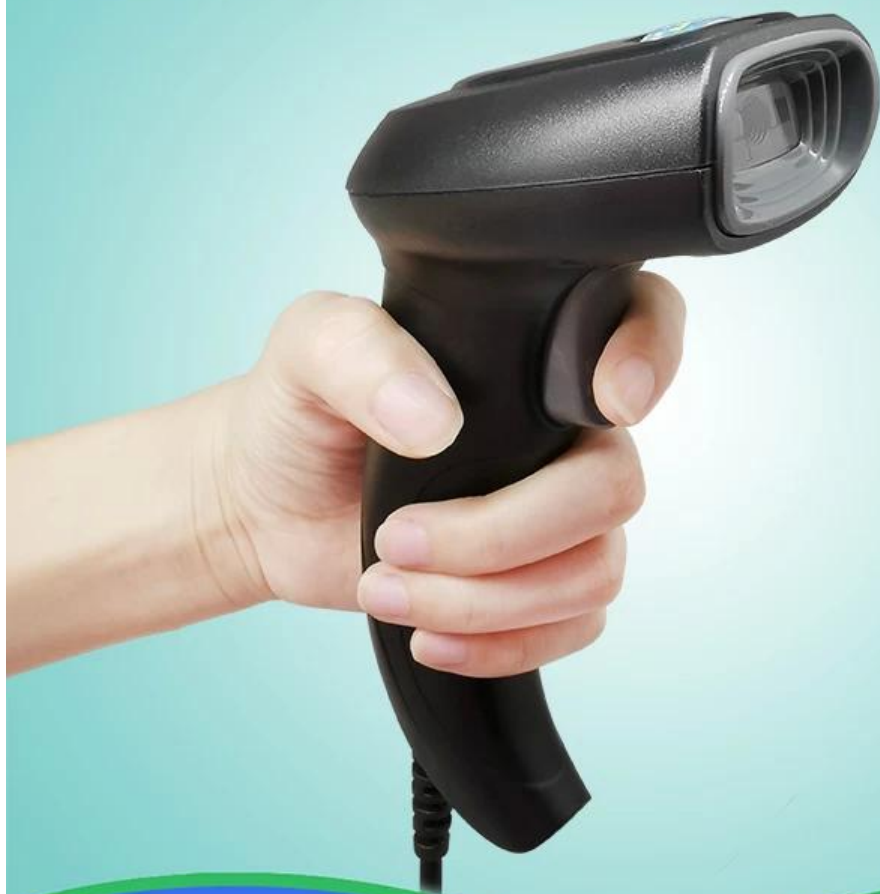



OCBS-2012





OCBS-2012





OCBS-2012





OCBS-2012





OCBS-2012





OCBS-2012

